

Introduction

With the deployment of Fast Ethernet to the desktop, Gigabit Ethernet has become the standard backbone link to connect workgroup switches to backbone switches or access routers.

The IEEE802.3-2002 specification defines, in Clause 36, a family of Physical Coding Sublayers (PCS) collectively known as 1000Base-X. It covers three embodiments within this family:

- 1000Base-CX for two pairs balanced copper cabling
- 1000Base-LX for long wavelength optical transmission
- 1000Base-SX for short wavelength optical transmission

In addition to standard compliance, the Core provides support for proprietary or industry standard 2500Base-X 2.5Gbps, 2000Base-X 2Gbps Ethernet connections.


The Core is compliant with Clause 36 of the IEEE802.3 standard and implements 8B/10B coding, link synchronization, frame encapsulation generation / termination. The Core also supports Auto-Negotiation (Clause 37 of IEEE802.3 standard).

The core can seamlessly connect to any industry standard Gigabit Ethernet SERDES (SERializer / DESerializer) device via a 20-Bit SDR or 10-Bit DDR interface and to the MorethanIP AnySpeed MAC Layer device with a 16-Bit Extended GMII (Gigabit Media Independent Interface).

The Core implements a PHY Management interface (MDIO) with control and management registers as defined in Clause 45 of the IEEE 802.3 specification.

1000 / 2500Base-X PCS core Features

- Implements Clause 36 of 802.3-2002 specification for 1000Base-X family of PCS (Physical Coding Sub-layer)
- Supports industry standard 2500Base-X / 2000Base-X connections or any Ethernet speeds up to 2.5Gbps
- Implements a 20-Bit Serdes interface and optionally, a 10-Bit DDR (Dual Data Rate) Serdes interface
- Extended 16-Bit GMII interface compatible with MorethanIP AnySpeed MAC Core
- Implements PCS frame encapsulation / de-encapsulation with /S/, /T/ orderset insertion / termination and // Idle ordered set generation during inter-packet gap
- Implements receive link synchronization state machine and 10-Bit data alignment from SERDES with K28.5 character detection
- Link coding implemented with 8B/10B providing DC balanced bitstream for efficient SERDES operation
- Implements User controllable 1000Base-X Auto-Negotiation (IEEE 802.3 Clause 37) which fully programmable node ability register
- Dual Gigabit / 2.5Gbps implementation with Embedded Virtex 5LXT Serdes or discrete Serdes solution
- MDIO Slave PHY Management interface which provides a standard interface for Core configuration and management
- Implements standard management register set as defined in Clause 45 of IEEE802.3 which specific Extended registers for improved flexibility
- Programmable physical MDIO address via an external 5-Bit address
- Programmable (Via PHY Management interface) GMII Loopback
- Can be implemented in FPGAs or ASICs
- Can optionally be delivered in VHDL or Verilog source code or netlist which provides a lower cost licensing option

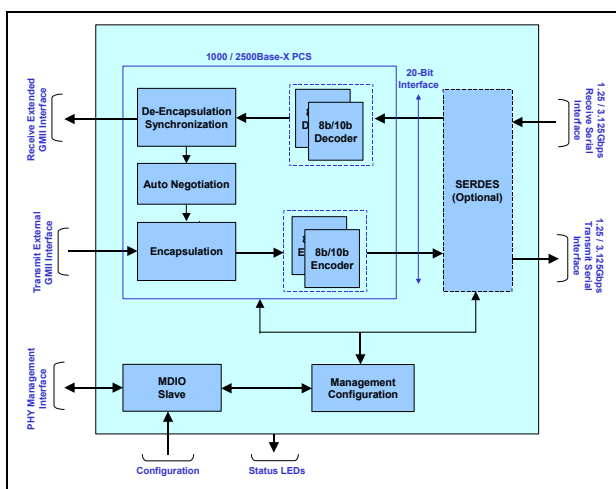


1000 / 2500Base-X PCS Core Block Diagram

Implementation Summary

Xilinx FPGA Implementation Summary

Core Specifics	
Supported Device Family	Virtex-5LXT / Virtex-5LXT
Version	1.1
Resources Used	
LUTs	680
FFs	390
Provided with Core	
Documentation	Datasheet, User Guide
Design File Formats	Source Code RTL Verilog / VHDL or Encrypted RTL Verilog / VHDL
Constraints File	UCF File
Verification	Verilog or VHDL Self-Checking Testbench
Supported Design Tools	
Xilinx Tool	9.1i or Later
Simulation	Modelsim 5.7 or Later
Synthesis	XST
Application Support	
Application	Required Speed Grade
2.5 Gigabit Ethernet	-1
Gigabit Ethernet	-1

Ordering Code

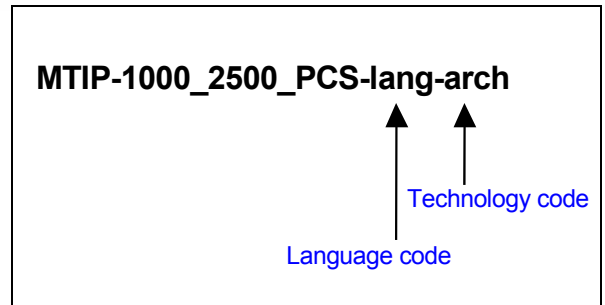

Language Code

Language Code	Delivery Language
BIN	Encrypted VHDL / Verilog Sources Code for Xilinx FPGAs.
VHDL	Synthesizable generic VHDL source code for Xilinx FPGA or ASICs implementations
VLOG	Synthesizable generic Verilog source code for Xilinx FPGAs or ASIC implementations

Technology Code

Technology Code	Technology
GEN	Source code option for FPGA, Structured ASICs and ASICs.
XLNX	Encrypted RTL for Xilinx FPGAs.

Contact

MorethanIP

E-Mail : info@morethanip.com

Internet : www.morethanip.com

Muenchner Strasse 199

D-85757 Karlsfeld

Germany

Tel : +49 (0) 8131 333939 0

FAX : +49 (0) 8131 333939 1